

SINREEN



Professional LED TV Manufacturer CBU SKD CKD for ATV/DTV/Smart TV

N Series Regular TV

S Series Smart TV

P Series Regular TV

U Series Smart TV

LOGO customization Packaging customization Remote control customization

Company introduction

SINOPEC LIAONING OPTRONIC TECHNOLOGY CO., LTD. founded in 2008, (own its brand Sinreen) is an enterprise integrating R&D, production, and sales of LED TVs, monitors, large live broadcast screens, projectors, smart tutoring machines, advertising machines, etc.



SINREEN is located in shenyang, Liaoning, and has a standardized workshop of more than 10,000 square meters, 3 advanced production lines, and more than 200 employees, including 10 senior R&D engineers.

Professional LED TV Manufacturer CBU SKD CKD for ATV/DTV/Smart TV

Over the years, SINREEN has always adhered to quality management and sold its high-quality and stable products to all parts of China, as well as to Europe, America, the Middle East, Africa, South-east Asia, and other parts of the world.



Our customers are very satisfied with our product quality and that's why they keep cooperating with us for many years. In 2018, the company concluded strategic cooperation with China, the top 5 air conditioner manufacturer in China, and became Chigo's exclusive designated manufacturer for TV and commercial display.

SINREEN has rich and successful experience in the TV industry during the past 15 years, and also has strong channels to purchase components so that we can low down customer purchasing costs.

We look forward to working with our customers to create a beautiful and brilliant future with high-quality products and good services!





N - SERIE Smart TV



N-21.5 "series



Screen size	21.5 inches	Screen ratio	16:09	Overall size	505.3*65.3*301.8mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤32W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*1, AV*1, USB*1, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Headphone audio*1				

N-23.6 "series



Screen size	23.6 inches	Screen ratio	16:09	Overall size	555*84*333.5mm
Resolution	1366*768	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤36W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*1, AV*1, USB*1, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Headphone audio*1				

N-32 "series



Screen size	32 inches	Screen ratio	16:09	Overall size	736*78*436.5mm
Resolution	1366*768	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤40W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*1, AV*1, USB*1, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Headphone audio*1				

N-38.5 "series



Screen size	38.5 inches	Screen ratio	16:09	Overall size	894.5*78.6*515.2mm
Resolution	1366*768	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤42W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*1, AV*1, USB*1, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Headphone audio*1				

N-39.5 "series



Screen size	39.5 inches	Screen ratio	16:09	Overall size	915.4*78.6*527.8mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤42W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*1, AV*1, USB*1, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Headphone audio*1				

N-43 "series



Screen size	43 inches	Screen ratio	16:09	Overall size	970*83.72*564mm
Resolution	1920*1080	Backlight brightness	210(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤48W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*2, AV*1, USB*2, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Coaxial*1 Headphone*1				

N-50 "series



Screen size	50 inches	Screen ratio	16:09	Overall size	970*83.72*564mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤68W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*3, AV*1, USB*2, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Coaxial*1 Headphone*1				

N-55 "series



Screen size	55 inches	Screen ratio	16:09	Overall size	1248.4*76.9*725.6mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤72W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*3, AV*1, USB*2, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Coaxial*1 Headphone*1				

N-58 "series



Screen size	58 inches	Screen ratio	16:09	Overall size	1308.9*76.9*766.6mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤75W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*3, AV*1, USB*2, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Coaxial*1 Headphone*1				

N-65 "series




Screen size	65 inches	Screen ratio	16:09	Overall size	1479.3*77.4*855.3mm
Resolution	1920*1080	Backlight brightness	220(cd/m2)	Contrast	PAL/NTSC/SECAM
Contrast	5000:1	Response time	4ms	Backlight Inner Type	Direct Type LED Light Emitting Diode
Refresh rate	50/60HZ	USB audio format	MP3/WMA	USB video format	AVI/MPG/MKV/MOV/MP4/RM/RMVB/FLV
Voltage	AC110-240V	Speaker output power	8 Ω 10W	USB audio format	MP3/WMA
Output power	≤105W	Speaker	2	USB image format	JPG/BMP/PNG/GIF
Input interface	HDMI*3, AV*1, USB*2, VGA*1 PC audio*1 RF antenna*1 (analog signal)				
Output Interface	Coaxial*1 Headphone*1				



Custom Options

- ▶ 1.Appearance LOGO customization
- ▶ 2.Remote control LOGO customization
- ▶ 3.Boot LOGO customization
- ▶ 4.Remote control customization
- ▶ 5.Built-in APP customization
- ▶ 6.Built-in language customization
- ▶ 7.Performance customization
- ▶ 8.Manual customization
- ▶ 9.Customized outer packaging
- ▶ 10.Special customization

1. Appearance LOGO customization

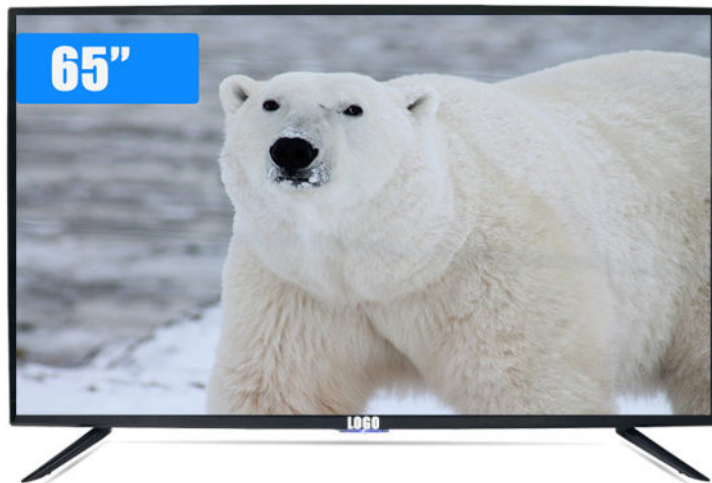

2. Remote control LOGO customization




3.Boot LOGO customization



4.Remote control customization



5. Built-in APP customization

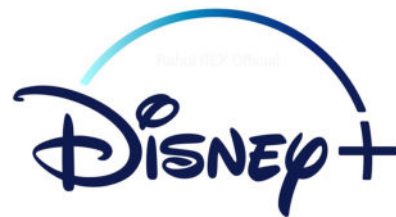

6. Built-in language customization



7. Performance customization



1. 512M+4G

3. 1.5G+8G

CVT

2. 1G+8G

4. 2G+16G

T2S2


8. Manual customization

Table of Contents

Basics	70 Messages
4 Read me first	73 Internet
6 Device overheating situations and solutions	75 Email
10 Device layout and functions	88 Gallery
17 Battery	93 All Email (Galaxy A30)
19 SIM or USIM card (nano-SIM card)	99 Always On Display (Galaxy A30)
25 Memory card (microSD card)	102 Multi-window
29 Turning the device on and off	105 Kids Home (Galaxy A30)
30 Initial setup	107 Galaxy Wearable
32 Samsung account	107 Samsung Members
34 Transferring data from your previous device (Smart Switch)	108 Samsung Notes
35 Understanding the screen	109 Calendar
48 Notification panel	110 Samsung Health
50 Entering text	114 Radio
	115 Voice Recorder
	116 My Files
	116 Clock
Apps and features	118 Calculator
53 Installing or uninstalling apps	119 Game Launcher
55 Baby Home (Galaxy A30)	122 SmartThings
57 Reminder	126 Sharing content
61 Phone	127 Google apps
66 Contacts	

GENERAL PARTS

MAIN UNIT



1. LED display screen
2. Remote control sensor / Power indicator- In standby mode the indicator light is red; when switching on the unit the indicator light is blue color.
3. Stand Holder
4. VOL +/- button- To increase/decrease the volume level or move left/right.
5. CH +/- button- To select next/previous channel or move up/down.
6. MENU button- To enter menu setting page.
7. SOURCE button- To select the input source.
8. POWER button- To turn the TV ON/OFF.

Wall Mount Specifications

Model No. LT-32N31054C

Compatible wall-mount size	Screw size for connecting the TV to the wall mount
VESA 200*200	Pan Head Screw M6x10mm(4PCS)


*The length of the screw specified is only a recommendation; actual length required can vary depending on the type of wall mount used.



Note:

1. Wall Mount is not included with the TV; it needs to be purchased separately.
2. Use only VESA-compatible wall mounts according to the specifications recommended for this model. Use of other wall mounts, or inappropriate installation may cause personal injuries or damage to the TV.
3. Please follow all instructions from the user manual of your chosen wall mount.


9. Customized outer packaging

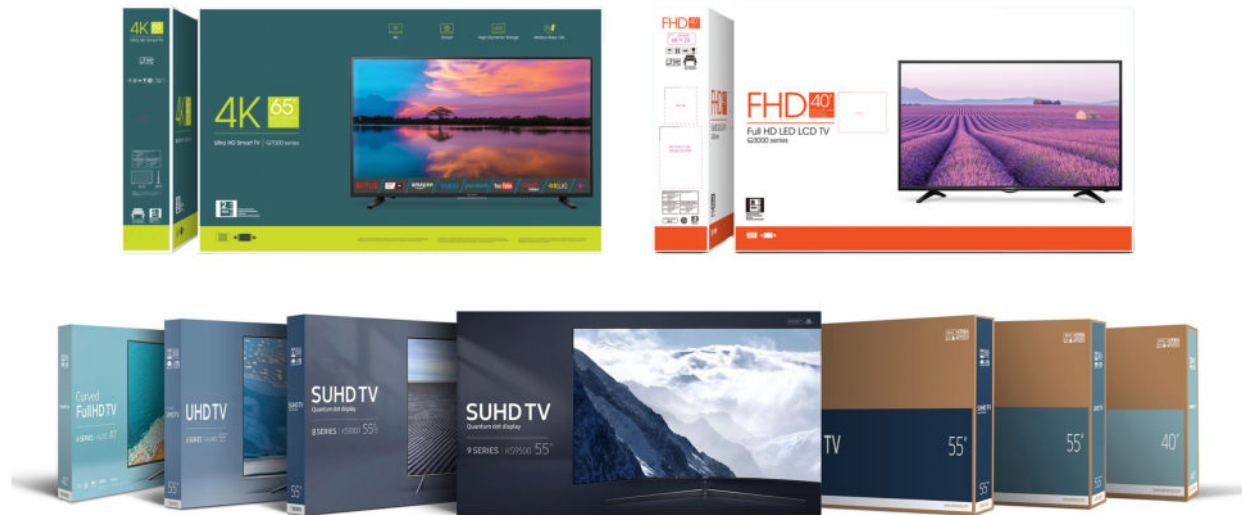

10. Special customization




Explosion-proof treatment

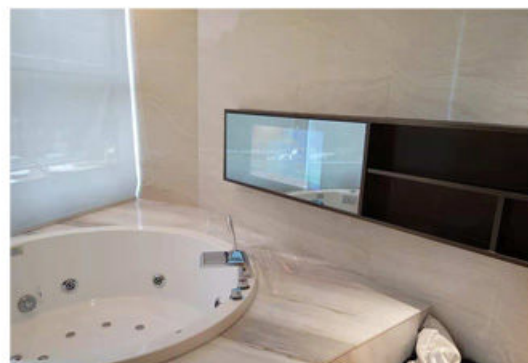

Waterproof treatment

TV processing flow chart

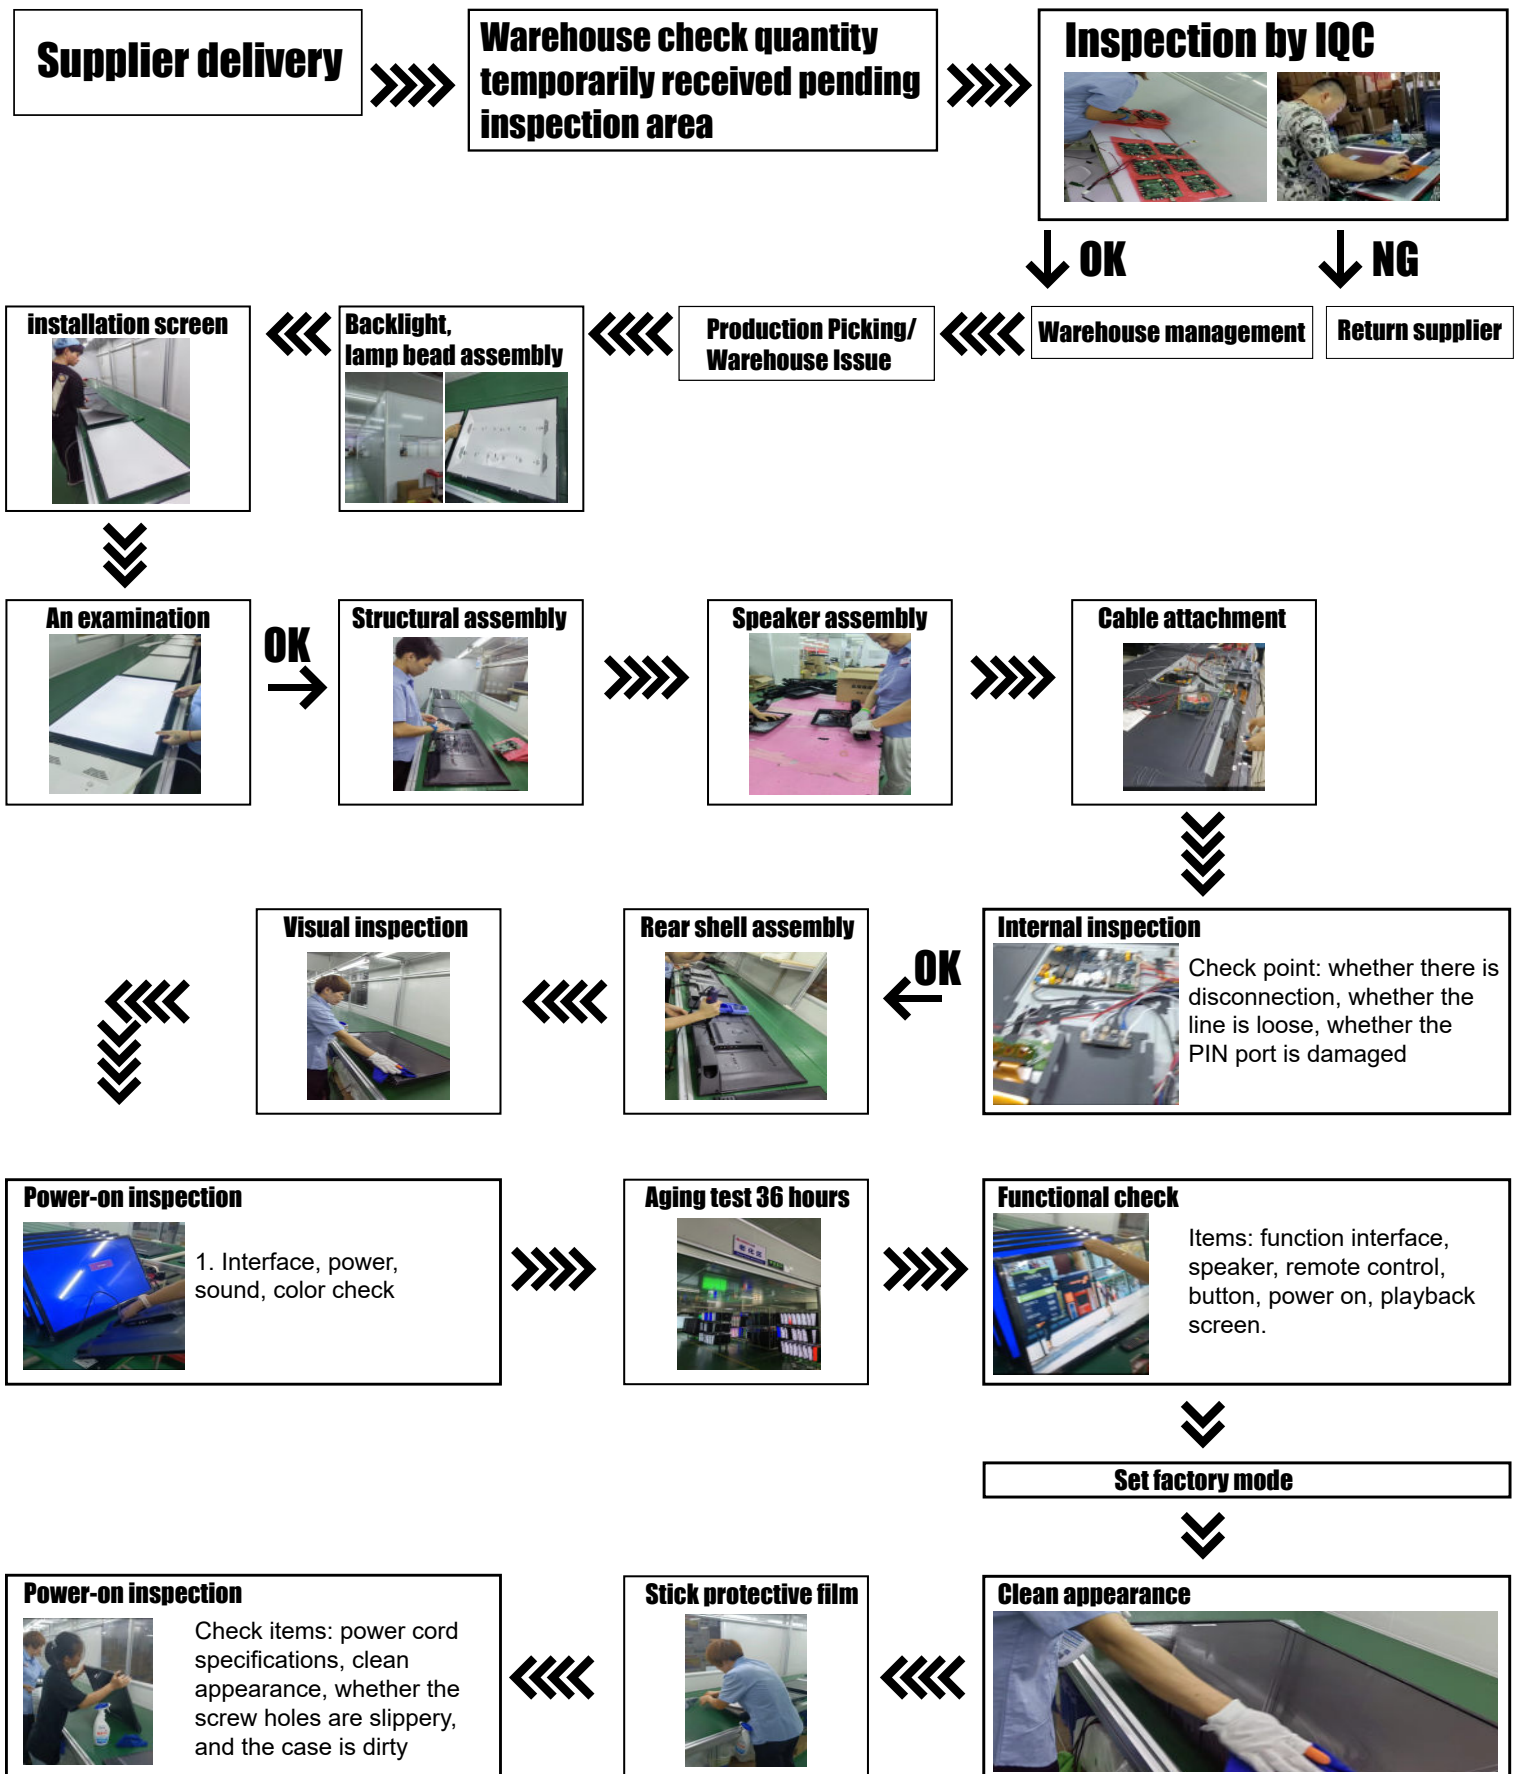

Put accessories/packaging



Finished packaging



Finished product stack



Inventory of finished products





VR showroom



SINREEN



SINOPED LIAONING OPTRONIC TECHNOLOGY CO., LTD.

Add : No. 863-11, Shangshengou Village Shenyang Liaoning

Web : <https://oemtv.cn/>

Email: sales@oemtv.cn

Tel: +86-13889390306